Flight:

Pilot	Call Sign	Side #	Freq	Role	T/O Time	тот	End Vul
Mike-Mike	Hellcat 1-1	105	260	CAS	:	:	:
Chief	Hellcat 1-2	053	260	CAS	:	:	:

Loadout:

7 6 5 4B 4A 3 2 1

Station 7	Mk-20	Station 4B	GAU-12	Station 3	Mk-20
Station 6	GBU-12 x 2	Ammo	SAPHEI-T	Station 2	GBU-12 x 2
Station 5	Mk-20	Station 4A	TARGET POD	Station 1	Mk-20

Fuel	7,758 LB
Gross Weight	28,821 LB

Countermeasure Bins:

Top Front Left	30 CHAFF
Top Front Right	30 CHAFF
Top Rear Left	30 FLARE
Top Rear Right	30 FLARE
Bottom Left	30 FLARE
Bottom Right	30 FLARE

Weather:

Clouds	Wind	Temperature	Precipitation
Scattered 9,000 ft	178 @ 2Kn GL 249 @ 11Kn 6600 ft 151 @ 25Kn 26000 ft	18°C	N/A

Mission Support:


Call Sign	Туре	Frequency	Role	Notes
Ghost 4-2	Ground	Green	Recon	

Mission:

Proceed north of Rafsanjan and make contact with Ghost 4-2. Target details will be passed by Ghost.

Flight Plan:

Waypoint	Alt (K Ft MSL)	Mach	Notes
1	22	0.65	
2	22	0.65	Contact Ghost 4-2
3	22	0.65	Egress
4	7.1		FARP Romeo
			BULLS N29°30′55″, E57°16 '24″

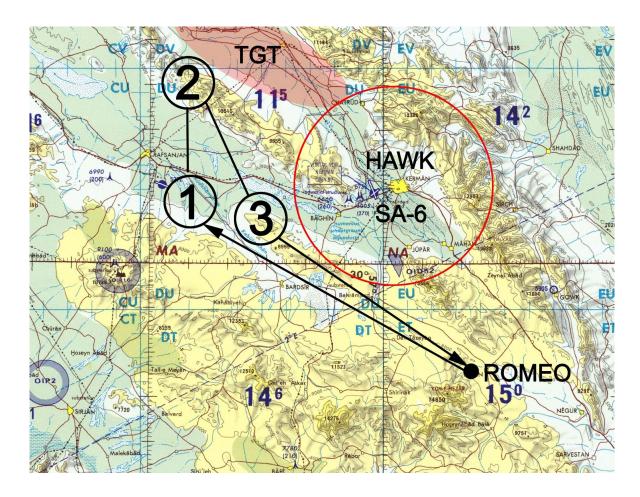



Fuel Plan:

Stage	Notes	Target Fuel lb
STARTING FUEL		7758
WP1	22Kft @ M0.65	6106
WP2	22Kft @ M0.65	5710
Bingo		1800
WP3	22Kft @ M0.65	1460
WP4	FARP ROMEO	850

Radio Plan:

Channel	Comm 1	Freq	Comm 2	Freq
1	Juliet Ground	141.0	Juliet Ground	141.0
2	Juliet Tower	141.5	Hellcat 1	260.0
3	Juliet Departure	142.25	Reaper 3-1	284.4
4	Juliet Arrival	142.6	Reaper 3-2	289.9
5	Juliet Emergency	143.1	Reaper 4-1	315.2
6	Chieftain	291.5	Wolf 4-2	267.0
7	Steel Rain	181.6	Spartan 3	351.6
8	Iceman	185.7	Sandman 1	281.8
9	Fixer	189.0	Sandman 5	289.4
10	Madman	193.2	Black	329.8
11	Cyclops 3	241.7	White	266.8
12	FARP Romeo	296.9	Red	312.0
13	SPARE		Orange	355.2
14	SPARE		Yellow	231.4
15	SPARE		Green	388.7
16	SPARE		Blue	251.5
17	SPARE		Indigo	363.4
18	SPARE		Violet	200.6
19	SPARE		Magenta	391.1
20	SPARE		Grey	241.3
21	SPARE		SPARE	
22	SPARE		SPARE	
23	SPARE		SPARE	
24	SPARE		SPARE	
25	SPARE		SPARE	
26	SPARE		SPARE	



Threats:

MIM-23 HAWK	
Guidance Type	Semi Active Radar Homing
Acquisition Range	49 nm
Max Engagement Range	25 nm
Max Ceiling	65,000 Ft MSL
Missile Mach	2.4
Warhead Type	119lb Frag HE
RWR Symbology	HA
Notable Features	US manufactured SAM system. Typical battery consists of Command Post, Search Radar, Track Radar and up to 6 launchers (3 missiles each). Some batteries may also contain a Continuous Wave Acquisition Radar, designed for low altitude detection. Missile burn time ~ 25 seconds.

SA-6 'GAINFUL'	
Guidance Type	Radar, command guidance, semi active radar homing
Acquisition Range	40 nm
Max Engagement Range	15 nm
Max Ceiling	40,000 Ft MSL
Missile Mach	2.8
Warhead Type	130lb Frag HE
Fuzing	Proximity/contact
RWR Symbology	6
Notable Features	Semi Active Radar Homing in terminal phase.
	Missile burn time ~ 21 seconds.
	Highly mobile, can be operational within 15 minutes of relocating.
	Typical configuration - 1 x Tracked 'Straight Flush' radar vehicle, 4 x tracked TEL's carrying 3 missile apiece.

VMA-311

SA-8 'GECKO'	
Guidance Type	Radar, command guidance
Acquisition Range	15 nm
Max Engagement Range	6 nm
Max Ceiling	39,000 Ft MSL
Missile Mach	2.0
Warhead Type	35lb Frag HE
Fuzing	Proximity/contact
RWR Symbology	8
Notable Features	Amphibious & highly mobile.
	Missile burn time ~ 15 seconds.
	6 missile load.

SA-15 'GAUNTLET'	
Guidance Type	Radar Command Guidance
Acquisition Range	15 nm
Max Engagement Range	8 nm
Max Ceiling	25,000 Ft MSL
Missile Mach	2.5
Warhead Type	30lb Frag HE
Fuzing	RF Proximity
RWR Symbology	15
Notable Features	Tracked TLAR highly mobile, carries 8 missiles ready to fire.
	Missile burn time ~ 7 seconds.

infus Dod
afer Dad
nfra-Red
/isual
3 nm
2,000 Ft MSL
9
2.6lb Frag HE
Contact / Grazing
Aan Portable Air Defence (MANPAD), highly mobile and easy to hide. Aay operate in teams of shooter/spotter, communicating over listance to ambush targets.
3 1 2 1 2 1

ZU-23 AAA	
Guidance Type	None
Acquisition Range	Visual
Max Engagement Range	1.5 nm
Max Ceiling	7,000 Ft MSL
Notable Features	Twin 23mm autocannon. Towed system, easy to relocate. Cheap and widely proliferated. Can be truck mounted for a highly mobile, low cost air defence platform. Fires HE rounds that explode on contact or at set altitude.

S-60 AAA	
Guidance Type	None
Acquisition Range	Visual
Max Engagement Range	3 nm
Max Ceiling	20,000 Ft MSL
Notable Features	Single 57mm autocannon. Capable of firing over 70 rounds per minute.
	Towed system, easy to relocate. Cheap and widely proliferated.
	Fires HE rounds that explode on contact or at set altitude.

ZSU-23-4 AAA	
Guidance Type	Radar
Acquisition Range	2.5 nm
Max Engagement Range	1.5 nm
Max Ceiling	7,000 Ft MSL
RWR Symbology	Α
Notable Features	Four x 23mm autocannon.
	Tracked and high mobile. Fires HE rounds that explode on contact or at set altitude.

ZU-57-2	
Guidance Type	None
Acquisition Range	Visual
Max Engagement Range	3 nm
Max Ceiling	20,000 Ft MSL
Notable Features	2 x 57mm autocannon. Tracked, self-propelled system. Uses a version of the widely proliferated S-60 AA cannon.